



# QJS06N 3 TON PROFESSIONAL JACK STAND

**Address:** 200 Cabel St. Louisville, KY 40206.

**Sales and Service:** 1-877-771-5438.

**Fax:** 502-583-5488.

**Website:** www.qualitylifts.com

### SPECIFICATIONS

Minimum Height.....	12.40"
Maximum Height.....	17.72"
Saddle Dimensions.....	4.3" x 1.18"
Weight.....	25.79 lb.

### ASSEMBLY

Remove both stands and ratcheting posts from box. Insert posts into stands. Bend in tab on side of collar using a punch and hammer. Lift release lever and lift ratcheting bar to desired height. Check to make sure the dog engages each tooth properly on the ratcheting post.

### OWNER/USER RESPONSIBILITY

The owner and/or user must have a thorough understanding of the manufacturer's operating instructions and warnings before using the Vehicle Support Stands. Personnel involved in the use and operation of equipment shall be careful, competent, trained, and qualified in the safe operation of the equipment and its proper use when servicing motor vehicles and their components. Warning information should be emphasized and understood. If the operator is not fluent in English, the manufacturer's instructions and warnings shall be read to and discussed with the operator in the operator's native language by the purchaser/owner, making sure that the operator comprehends its contents. Owner and/or user must study and maintain for future reference the manufacturer's instructions and pertinent warning information. Owner and/or user is responsible for keeping all warning labels and instruction manuals legible and intact. Replacement labels and literature are available from the manufacturer.

### INSPECTION

Visual inspection should be made before each use of the stand. Any stand which appears to be damaged in any way, found to be badly worn, or operates abnormally, MUST BE REMOVED FROM SERVICE. If the stand is accidentally subjected to an abnormal load or shock, it must be inspected by a manufacturer's authorized repair facility immediately. It is recommended that an annual inspection of the stand be made by a manufacturer's authorized repair facility and that any defective parts, decals, or warning labels be replaced with manufacturer's specified parts. A list of authorized repair facilities is on a separate page insert.



**⚠ WARNING**

**STUDY, UNDERSTAND, AND FOLLOW ALL INSTRUCTIONS BEFORE OPERATING THIS DEVICE.**

**DO NOT EXCEED RATED CAPACITY.**

**USE ONLY ON HARD LEVEL SURFACE.**

**CENTER LOAD ON SADDLE.**

**USE AS A MATCHED PAIR TO SUPPORT ONE END OF A VEHICLE ONLY.**

**FAILURE TO HEED THESE MARKINGS MAY RESULT IN PERSONAL INJURY AND/OR PROPERTY DAMAGE.**

**STANDS ARE NOT TO BE USED TO SIMULTANEOUSLY SUPPORT BOTH ENDS OR ONE SIDE OF A VEHICLE.**

**NO ALTERATIONS SHALL BE MADE TO THIS PRODUCT.**


### OPERATING INSTRUCTIONS

Begin by setting parking brake on vehicle and blocking all wheels. Make sure vehicle is raised to desired height and is stable. Extend the post to height close to the support member. Check the load locking and release handle to insure that the dog portion has engaged a tooth on the post. Make sure both jack stands are at an equal height and will support the load equally when the lifting device is removed. Place jack stands carefully under support points specified by vehicle manufacturer. Do not crawl under vehicle when placing or removing stands! SLOWLY lower the load onto the jack stands and check to insure the load is located on the center portion of the post saddle. Check the load for stability. If the load is NOT located on the center of the post saddle, or if the load is not stable, re-lift the load and reposition the jack stands to insure proper loading before continuing with work or repairs.

**NOTE:** When using jack stands for body shop work such as straightening of frame and/or body of vehicle, use caster wheel type jack stand dollies to prevent load from being pulled off jack stands. When removing stands, carefully raise vehicle enough to clear the stands, making sure the vehicle remains stable. Remove stands, being careful not to crawl under vehicle while doing so. Carefully lower vehicle to floor.

# **QJS06N**

## **3 TON PROFESSIONAL JACK STAND**

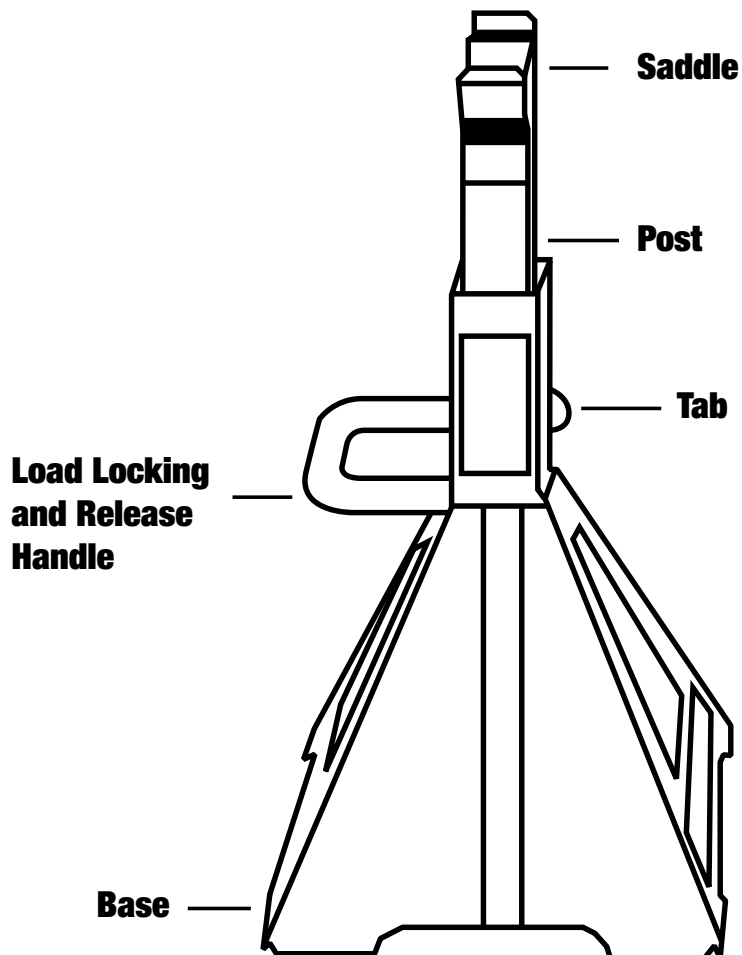

**Note:** Replacement parts are not available due to safety precautions.

### **LIMITED WARRANTY:**

QUALITY LIFTS WARRANTS TO ITS CUSTOMERS THAT THE COMPANY'S JACK STANDS ARE FREE FROM DEFECTS IN WORKMANSHIP AND MATERIALS.

Quality Lifts will repair or replace its hydraulic jacks which fail to give satisfactory service due to defective workmanship or materials, based upon the terms and conditions of the following described warranty plans attributed to that specific product.

This product carries a ONE-YEAR limited warranty. During this warranty period, Quality Lifts will repair or replace at our option any part or unit which proves to be defective in material or workmanship.

This warranty does not cover damage and normal wear and tear to consumable parts. This warranty does not cover any repairs or replacement made by anyone other than Quality Lifts or its authorized hydraulic service centers.

The foregoing obligation is Quality Lifts sole liability under this or any implied warranty and under no circumstances shall we be liable for any incidental or consequential damages.

Note: Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. To determine if your product issue is covered by warranty, please call Quality Lifts sales and service number. If a repair or replacement part is needed, a RMA # will be issued.

Return equipment or parts to any Quality Lifts authorized service center, transportation prepaid. Be certain to include your name and address, evidence of the purchase date, Quality Lifts RMA# and description of the suspected defect.

If you have any questions about warranty service, please write to Quality Lifts. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

**Address:** 200 Cabel St. Louisville, KY 40206. **Sales and Service:** 1-877-771-5438. **Fax:** 502-583-5488. **Website:** [www.qualitylifts.com](http://www.qualitylifts.com)